



CE EAC
No. 08190322KTN.UU45

KTN
Kara Technology News®

VÁLVULA DE BOLA, 1 PIEZA, PASO REDUCIDO, ROSCA BSP

DN8 - DN100 | PN63

Cuerpo en acero inoxidable

BALL VALVE, 1 PIECE, REDUCED BORE, BSP THREADED

DN8 - 100 | PN63

Stainless steel body


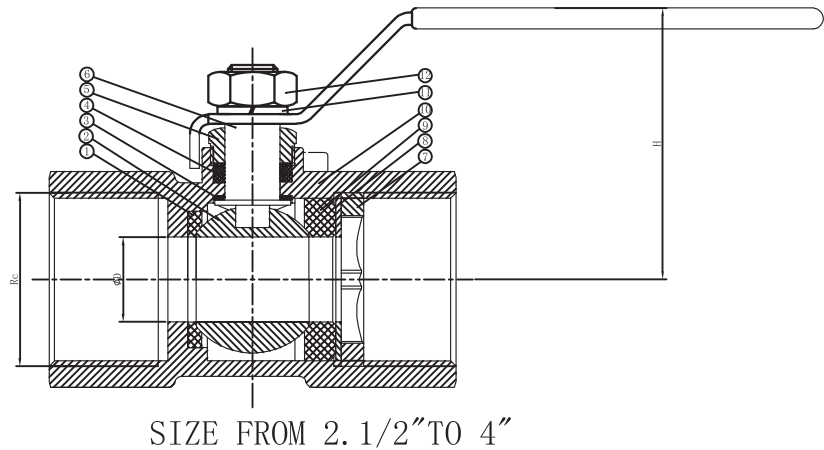


FIG.
1111


DISEÑO / DESIGN	Monocuerpo / Monoblock
EXTREMOS ROSCADOS ACC THREADED ENDS ACC.	ISO 7-1 (EN 10226-1)
TEST	API 598
MAX. TEMP	-29 + 120°C
PRESIÓN / PRESSURE	PN 63
MEDIO / MEDIUM	Agua, aceite y gas Water, oil and gas

DN	8	10	15	20	25	32	40	50	65	80	100
PESO WEIGHT (Kg)	0.06	0.1	0.16	0.245	0.365	0.6	0.8	1.31	2.335	3.495	9.045
TORQUE	3	3	3	4.5	5	7	8	16	21	26	40

DN	øD	ød	L	W	H
8	1/4"	5	38	75	32
10	3/8"	6.9	43	85	32
15	1/2"	8.5	54	98	35
20	3/4"	12	57	98	38
25	1"	15	67	110	52
32	1 1/4"	20	76	124	57
40	1 1/2"	25	82	139	61
50	2"	32	93	160	66
65	2 1/2"	38	113	200	95
80	3"	48	134	200	102
100	4"	65	185	250	133

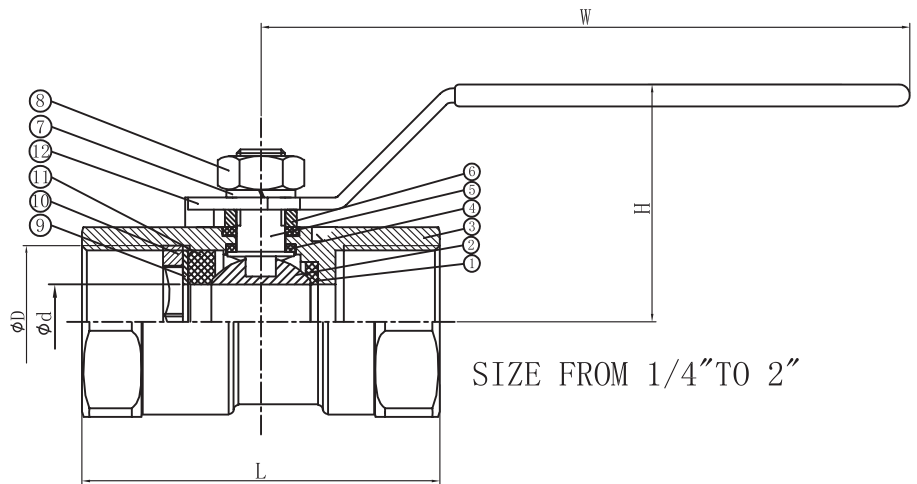

Curva presión / temperatura:



6	Prensaestopas / Gland nut	304	12	Manguito / Lever	SS201
5	Vástago / Stem	316	11	Asiento / Seat	PTFE
4	Empaquetadura / Packing	PTFE	10	Cojinete / Bushing plug	304
3	Cuerpo / Body	CF8M	9	Arandela / Washer	304
2	Esfera / Ball	316	8	Tuerca del vástago / Stem Nut	304
1	Asiento / Seat	PTFE	7	Muelle / Spring	304
Nº	PIEZA / DESIGNATION	MATERIAL	Nº	PIEZA / DESIGNATION	MATERIAL